


ArcelorMittal International
North America



ArcelorMittal

Structural Shapes

Sales program and product information

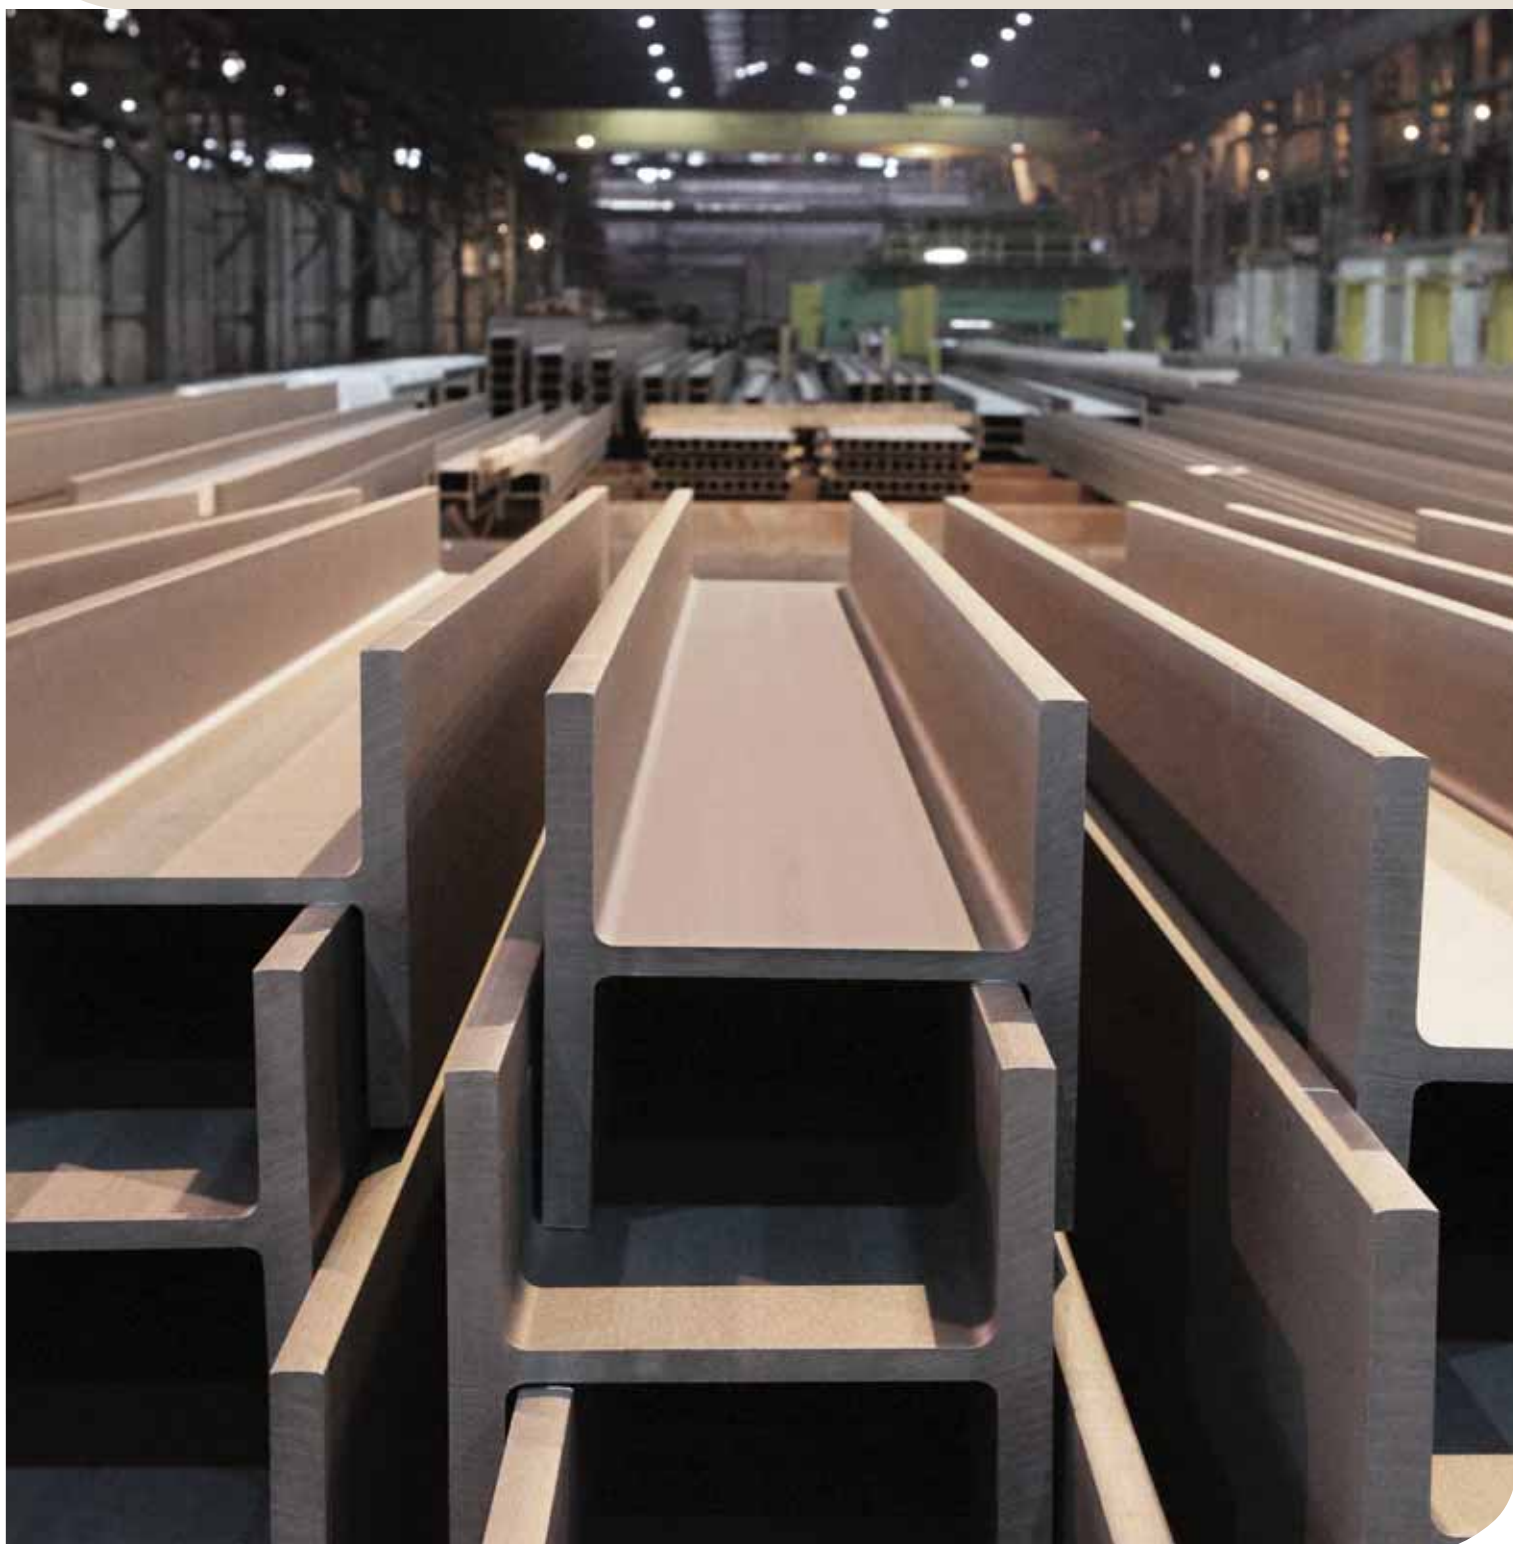

ArcelorMittal International
North America Headquarters
1 South Dearborn Street, 18th floor
Chicago, IL. 60603

Chicago
Vincent Mondelli - Director
T +1 312 899 3961
M +1 312 316 5359
vincent.mondelli@arcelormittal.com

Shelley Finnigan, S.E. - Global technical sales
T +1 312 899 3051
M +1 312 450 9525
shelley.finnigan@arcelormittal.com

Robert Caroti - Sales and Business Development
T +1 312 899 3960
M +1 312 504 7096
robert.caroti@arcelormittal.com

Canada / Burlington
Angelo Curcuru - Sales manager
T +1 905 631 9500
M +1 905 320 6649
angelo.curcuru@arcelormittal.com

México / Querétaro
Priv. de los Industriales No. 110-A, Desp. 802
Col. Ind. Benito Juárez, 76100 Querétaro, Qro.

Jose Bustos - Sales manager
T +52 442 218 2887
M +52 442 322 6207
jose.bustos@arcelormittal.com

Table of contents

1. Expert in steel and structural shapes	4
2. HISTAR®	6
3. HISTAR® in North America	
Material specification: ASTM A913	7
Design and fabrication	8
Extra value, same price	10
4. HISTAR® frequently asked questions	12
5. Applications of HISTAR®	14
6. HISTAR® reference projects	15

Expert in steel and structural shapes

ArcelorMittal is the world's leading steel and mining company, with a presence in 60 countries and an industrial footprint in 18 countries. Guided by a philosophy to produce safe, sustainable steel, we are the leading supplier of quality steel in the major global steel markets including automotive, construction, household appliances and packaging, with world-class research and development and outstanding distribution networks.

In 2018, ArcelorMittal had revenues of US \$76.0 billion and crude steel production of 92.5 million metric tonnes while our iron ore production reached 58.5 million metric tonnes. For the construction industry, ArcelorMittal offers innovative, competitive and



ArcelorMittal office building (AOB), Luxembourg



Electric arc furnace

Located in Luxembourg, this mill is home to several world firsts in the steel industry. In 1902, we rolled the first parallel wide flange shape and shortly after, in 1911, we produced the first steel section measuring 40 inches (one meter) in depth. This mill also introduced Tallor-Made beams (WTM) in 1979 – profiles that were praised by both structural engineers and fabricators as a cost effective alternative to built-up sections and concrete. Today, ArcelorMittal offers the largest range of shapes in the world including W14 x 16 sections weighting up to 873 lbs/ft, W36 x 16 1/2 profiles weighting up to 925 lbs/ft, and W40 x 16 sections weighting up to 655 lbs/ft.

sustainable solutions to engineers and fabricators. Our experience in the production of structural shapes is best represented by the history of our Grey mill at ArcelorMittal Differdange.

Rolling program - "W" shapes

Section	Footweights (lbs/ft)															
W44 x 16	230	262	290	335	368	408										
W40 x 16	199	215	249	277	297	324	362	372	397	431	503	593	655			
W40 x 12	149	167	183	211	235	264	278	294	331	392						
W36 x 16 1/2	231	247	262	282	302	330	361	395	441	487	529	652	723	802	853	925
W36 x 12	135	150	160	170	182	194	210	232	256	286	318	350	387			
W33 x 15 3/4	201	221	241	263	291	318	354	387								
W33 x 11 1/2	118	130	141	152	169											
W30 x 15	173	191	211	235	261	292	326	357	391							
W30 x 10 1/2	90	99	108	116	124	132	148									
W27 x 14	146	161	178	194	217	235	258	281	307	336	368	539				
W27 x 10	84	94	102	114	129											
W24 x 12 3/4	104	117	131	146	162	176	192	207	229	250	279	306	335	370		
W24 x 9	68	76	84	94	103											
W24 x 7	55	62														
W21 x 8 1/4	48	55	62	68	73	83	93									
W21 x 6 1/2	44	50	57													
W18 x 11	76	86	97	106	119	130	143	158	175							
W18 x 7 1/2	45	50	55	60	65	71										
W18 x 6	35	40	46													
W16 x 10 1/4	67	77	89	100												
W16 x 7	36	40	45	50	57											
W16 x 5 1/2	26	31	36													
W14 x 16	426	455	500	550	605	665	730	808	873							
W14 x 16	145	159	176	193	211	233	257	283	311	342	370	398				
W14 x 14 1/2	90	99	109	120	132											
W14 x 10	61	68	74	82												
W14 x 8	43	48	53													
W14 x 6 3/4	30	34	38													
W14 x 5	22	26														
W12 x 12	65	72	79	87	96	106	120	136	152	170	190	210	230			
W12 x 10	53	58														
W12 x 8	40	45	50													
W12 x 6 1/2	26	30	35													
W12 x 4	14	16	19	22												
W10 x 10	49	54	60	68	77	88	100									
W10 x 8	33	39	45													
W10 x 5 3/4	22	26	30													
W10 x 4	12	15	17	19												
W8 x 8	31	35	40	48	58	67										
W8 x 6 1/2	24	28														
W8 x 5 1/4	18	21														
W8 x 4	10	13	15													
W6 x 6	15	20	25													
W6 x 4	9	12	16													
W5 x 5	16	19														
W4 x 4	13															

Sections in **bold** are available in HISTAR® ASTM A913, Grades 50, 65 and 70.

Sections in **orange** are available in A913 Grade 65 from ArcelorMittal's North American stock location.

"S" shapes

Section	Footweights		
S24	121	106	100
S24	90	80	
S20	96	86	75
S20	66		
S18	70	54.7	
S15	50	42.9	
S12	50	40.8	35
S12	31.8		
S10	35	25.4	
S8	23	18.4	
S7	20	15.3	
S6	17.25	12.5	
S5	10		
S4	9.5	7.7	
S3	7.5	5.7	

"MC" shapes

Section	Footweights				
MC18	42.7	45.8	51.9	58	
MC12	31	35	40	45	50
MC10	22	25	28.5	33.6	41.1
MC9	23.9	25.4			
MC8	22.8	21.4	20	18.7	
MC7	19.1	22.7			
MC6	15.1	15.3			

"L" shapes

Section	Thickness						
L12 x 12	1	1 1/8	1 1/4	1 3/8			
L10 x 10	3/4	7/8	1	1 1/8	1 1/4	1 3/8	
L8 x 8	1/2	9/16	5/8	3/4	7/8	1	1 1/8

"C" shapes

Section	Footweights	
C12	20.7	25
C10	15.3	20
C8	11.5	13.75

sections.arcelormittal.com

Subject to change without notice. For complete product information and other section ranges, please refer to ArcelorMittal Sections and Merchant Bars sales program.

HISTAR®

In 1990, ArcelorMittal introduced high-strength, low-alloy HISTAR® steel to the world market. HISTAR® is different from other steel on the market as it is produced using the specialty, in-line Quenching and Self-Tempering (QST) process.

With the development of HISTAR® steel, ArcelorMittal succeeded in creating structural steel that combines high yield strength with excellent toughness and outstanding weldability – material properties that had historically been considered incompatible. fabrication and reduced costs.



Rolled section entering QST bank (left)



W36 X 925 in HISTAR®

W14 x 90 – 132
W14 x 145 – 873
W36 x 150 – 387
W36 x 231 – 925
W40 x 167 – 392
W40 x 199 – 655
W44 x 230 – 408

Popular sizes available in HISTAR®

HISTAR® steel is delivered in accordance with the European Technical Approval ETA 10/156 and is compatible with material standards throughout the world. Hot-rolled I-shaped structural profiles delivered in HISTAR® grades enable the design of innovative structures that have improved efficiency, simplified fabrication and reduced costs.

Material specification: ASTM A913

Conforming to the ASTM A913 specification, which was originally published in 1993, HISTAR® is well recognized in the North American market. The material is available in yield strengths of 50 ksi [345 MPa], 65 ksi [485 MPa] and 70 ksi [485 MPa] - the highest in the market for structural shapes. In addition, HISTAR®'s toughness characteristics demonstrate good performance in even the most taxing of environmental conditions. Its low-alloy content allows for favorable welding characteristics, in many cases requiring no preheat prior to performing welding procedures.

Chemical requirements

Element	Maximum content in %		
	Grade 50 [345]	Grade 65 [450]	Grade 70 [485]
Carbon	0.12	0.12	0.12
Manganese	1.60	1.60	1.60
Phosphorus	0.030	0.030	0.030
Sulphur	0.030	0.030	0.030
Silicon	0.40	0.40	0.40
Copper	0.45	0.35	0.45
Nickel	0.25	0.25	0.25
Chromium	0.25	0.25	0.25
Molybdenum	0.07	0.07	0.07
Columbium	0.05	0.05	0.05
Vanadium	0.06	0.08	0.09

Key material properties

Mechanical Properties

- Charpy V-notch tests shall be made in accordance with Specification A673/A673M, Frequency H.
- The test results of full-size specimens shall meet an average value of 40 ft-lbf [54 J] at 70°F [21 °C].

Maximum Carbon Equivalent

Grade 50 [345]: 0.38%
 Grade 65 [450]: 0.43%
 Grade 70 [485]: 0.45%

Tensile requirements

Grade	Yield point, min.	Tensile strength, min.	Elongation, min.	
	ksi [MPa]	ksi [MPa]	8 inch [200 mm], %	2 inch [50 mm], %
50 [345]	50 [345]	65 [450]	18	21
65 [450]	65 [450]	80 [550]	15	17
70 [485]	70 [485]	90 [620]	14	16

Supplementary requirements

- S30. Charpy V-Notch (CVN) Impact Test for Structural Shapes: Alternate Core Location*
- S30.1 For shapes with a flange thickness equal to or greater than 1-1/2 in. [38.1 mm] that are specified in the purchase order to be tested in accordance with this supplementary requirement, CVN impact tests shall be conducted in accordance with Specification A673/A673M, using specimens taken from the alternate core location. Unless otherwise specified in the purchase order, the minimum average absorbed energy for each test shall be 20 ft-lbf [27 J] and the test temperature shall be 70°F [21 °C].
- S75. Maximum Yield Point to Tensile Strength Ratio - Grade 50 [345].
- S75.1 The maximum yield point shall be 65 ksi [450 MPa].
- S75.2 The maximum yield to tensile ratio shall be 0.85.
- S77. Reduced Sulphur – Grade 65 [450]*
- S77.1 The Grade 65 [450] shall be furnished with a maximum sulphur of 0.010 percent.
- S77.2 The Grade 70 [485] shall be furnished with a maximum sulphur of 0.010 percent.

*extra costs may apply

Design and fabrication

As a result of the material's favorable mechanical properties, HISTAR® has received widespread approval by major structural design and fabrication codes throughout the world. This acceptance includes the incorporation of the ASTM A913 specification into the International Building Code; AISC's Steel Construction Manual (AISC 360) and Seismic Design Manual (AISC 341); CISC's Handbook of Steel Construction; and AWS's Structural Welding Code (AWS D1.1).



A913 Grade 65 sections used in transfer trusses

Strength

Available in yield strengths of up to 70 ksi [485 MPa], A913 steel has been an approved material specification by AISC since 1995. This acceptance was first reflected in the 1999 version of AISC 360. The material, at any yield strength, can be used in gravity designs with the same phi factors and design limits as any other material in the code.

For seismic design, AISC 341 Section A3.1 permits the use of A913 Grade 50 [345] in any part of the seismic force resisting system. When using A913 Grade 50 [345] in locations where inelastic behavior is expected, Supplementary Requirement S75 needs to be indicated in the purchase order. This requirement is made available at no additional cost.

AISC 341, Section A3.1 also permits the use of A913 Grades 65 [450] and 70 [485] in members where the steel is not expected to yield, i.e. column sections in strong-column, weak-beam applications. This allowance can lead to more efficient designs and cost savings for projects.

Design and fabrication

Weldability

With maximum carbon equivalent values less than or equal to 0.45 percent, A913 Grades 50 [345], 65 [450] and 70 [485] have inherently good weldability characteristics.

Recognition of this benefit is reflected by acceptance of A913 into AWS D1.1. Preheat requirements for the material are summarized as follows:

AWS D1.1, Minimum preheat temperatures

Thickness, in. [mm]	Minimum preheat temperatures, °F [°C]		
	A913		
	Grade 50 [345]	Grade 65 [450]	Grade 70 [485]
1/8 to 3/4 incl. [3 to 20 incl.]	32 [0]*	32 [0]*	50 [10]
Over 3/4 to 1-1/2 incl. [Over 20 to 38 incl.]	32 [0]*	32 [0]*	150 [65]
Over 1-1/2 to 2-1/2 incl. [Over 38 to 65 incl.]	32 [0]*	32 [0]*	225 [110]
Over 2-1/2 [Over 65]	32 [0]*	32 [0]*	300 [150]

*Requires low hydrogen diffusible electrode, H8 or better. For metal at temperatures below 32 °F [0 °C], minimum preheat is 70 °F [20 °C].

When selecting welding consumables compatible with ASTM A913 grades, AWS D1.1 suggests E70, E80 and E90 electrodes be used when matching weld metal strength is required for Grades 50 [345], 65 [450] and 70 [485], respectively. In certain conditions, AWS D1.1 allows undermatching weld metal, please refer to the code for additional details.

Tests have demonstrated that preheat requirements for A913 Grade 70 material up to 2.6 inches (70 mm) in

thickness can be reduced to match AWS D1.1 guidelines for ASTM A913 Grades 50 and 65. For more information on leveraging this benefit, please contact ArcelorMittal directly.”

Toughness

For all grades and thicknesses of A913 steel, the minimum toughness is 40 ft-lbf [54 J] at 70 °F [21 °C] at the flange location. This is guaranteed at no extra cost to the end user and is included in the test results on the material test report.

Upon agreement, ASTM A913 sections can be provided meeting a CVN requirement of 20 ft-lbf [27 J] at 70 °F [21 °C] at the alternate core location (web-flange intersection). This enables the material to meet the requirements of AISC 360 Section A3.1, which requires such CVN values for steel used in tensile applications and featuring flange thickness exceeding 2 in. (50 mm), as well as those of AISC 341 Section A3.3, which requires such values for steel used in seismic force resisting systems and featuring flange thicknesses exceeding 1-1/2 in. (38 mm).

Also upon agreement, ASTM A913 steel can be supplied meeting CVN requirements down to -58 °F [-50 °C], a characteristic that is particularly attractive when the material is used in exposed, cold weather applications.

Extra value, same price

HISTAR® steel under the ASTM A913 specification is sold in the North American market without a premium over comparable steels (i.e. ASTM A992, A572 Grade 50 and CSA 40.21 350W). This means that users benefit from all the extra value HISTAR® has to offer - high strength, improved weldability and good toughness characteristics - for the same price they would pay for comparable materials.

Comparing A913 to other material

	A913			A992
	Grade 50 [345]	Grade 65 [450]	Grade 70 [485]	
Yield strength ksi [MPa]	50 [345]	65 [450]	70 [485]	50 [345]
Tensile strength, ksi [MPa]	65 [450]	80 [550]	90 [620]	65 [450]
Max. yield, ksi [MPa]	65 [450]*	No Max	No Max	65 [450]
Max yield to tensile ratio	0.85*	No Max	No Max	0.85
Min CVN: 40 ft-lbf [54 J] @ 70°F [21 °C]	Yes	Yes	Yes	No
Max sulphur %	0.030	0.030	0.030	0.045
Max carbon %	0.12	0.12	0.12	0.23
Max CE %	0.38	0.43	0.45	0.47/0.45**
Weldable without preheat	Yes***	Yes***	No***	No

*S75 available upon request at no additional charge

**0.47% for section with flange thickness above 2 in. [50 mm], 0.45% for all other shapes

***See page 7 for complete details

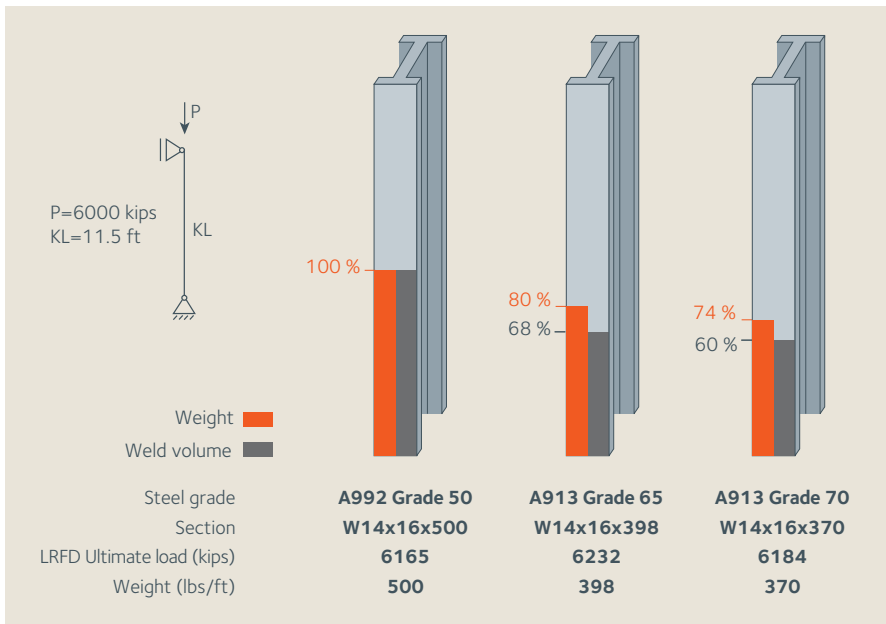


Figure 1: Using HISTAR® sections to reduce column weight

When compared to other structural steels, high-strength HISTAR® steel results in reduced weight and material costs of structures. HISTAR® also contributes to cost savings in welding, fabrication and erection.

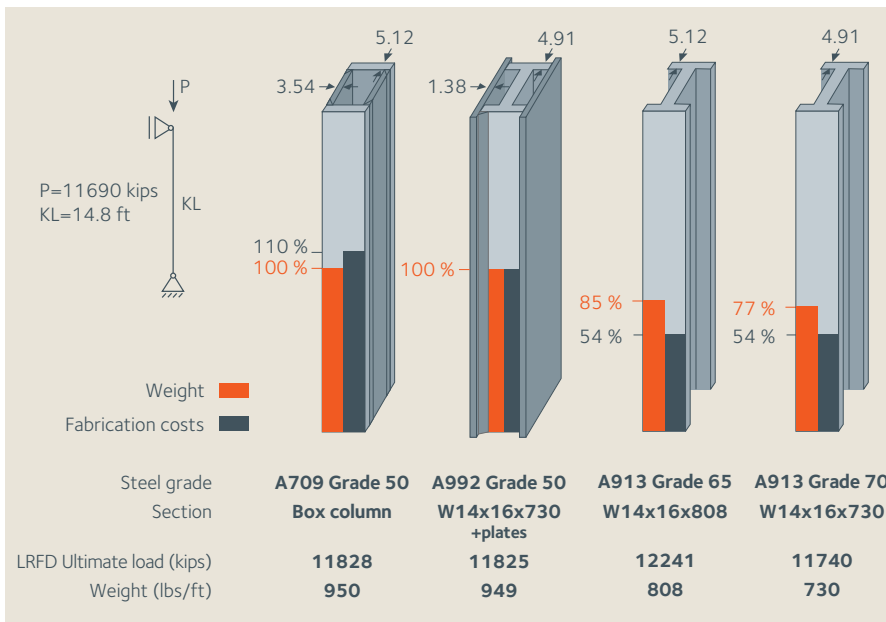


Figure 2: Using HISTAR® sections to replace built-up columns

Employing high-strength HISTAR® steel enables designers to substitute complicated and expensive built-up sections with economical hot-rolled profiles.

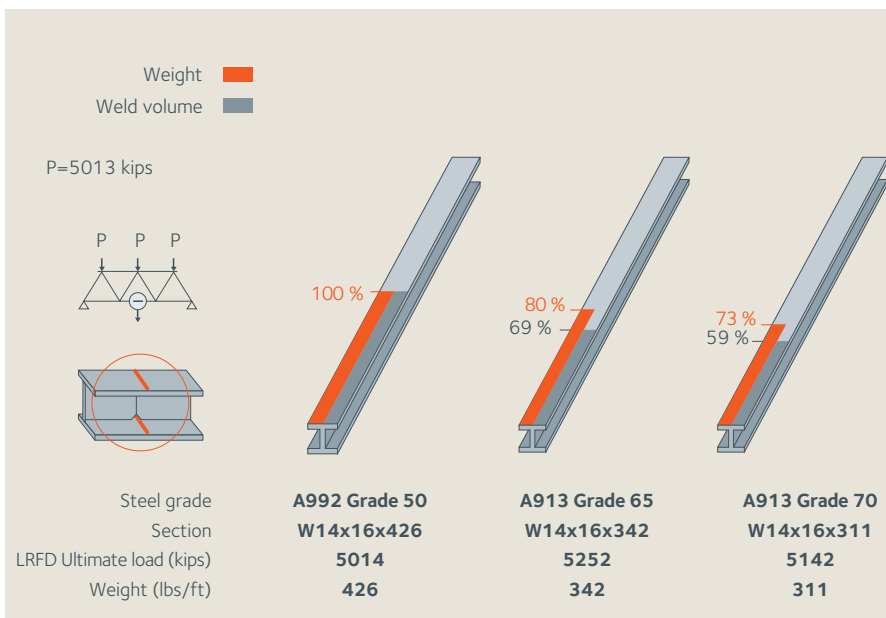


Figure 3: Using HISTAR® sections to reduce weight of truss chord members

HISTAR® steel brings great benefit to the design of tension members in trusses. When used in these applications, the high-strength steel can not only lead to material cost savings but also reduction of the dead load of the system. The weight savings result in the ability to use thinner, more efficient sections and ultimately reduced fabrication costs.

HISTAR® frequently asked questions (FAQs)

How are HISTAR® and ASTM A913 material related?

HISTAR® is the trademark of ArcelorMittal's high-strength low-alloy steel shapes produced by a thermomechanical rolling process in combination with quenching and self-tempering. ASTM A913 is the product standard to which HISTAR® steel conforms in the ASTM specification.

What is the availability of A913 grades?

A913 shapes are available in Grades 50, 65 and 70. Delivery time to North American ports is approximately 8-12 weeks after the material has rolled (add 2 weeks for West Coast ports). Popular shapes are generally rolled monthly.

Are ASTM A913 shapes available from North American stock locations?

Yes. ArcelorMittal carries ASTM A913 Grade 65 shapes in stock in North America. The sizes available are summarized below and listed on page five.

W14 x 16 x 145 – 873 W27 x 14 x 539
W36 x 16 1/2 x 231 – 925 W40 x 16 x 199, 277, 431-655
Contact our sales office for more information.

What shapes are available in HISTAR®/ASTM A913?

Available ASTM A6 shapes are indicated, in detail, in the ArcelorMittal rolling program (see page five).

A quick-reference summary follows:

W12 x 12 x 65 – 230	W30 x 15 x 173 – 391*
W14 x 14.5 x 90 – 132	W33 x 11.5 x 130 – 169
W14 x 16 x 145 – 873	W33 x 15.75 x 201 – 387*
W24 x 9 x 84 – 103	W36 x 12 x 150 – 387
W24 x 12.75 x 104 – 370	W36 x 16.5 x 231 – 925
W27 x 10 x 102 – 129	W40 x 12 x 167 – 392
W27 x 14 x 146 – 539*	W40 x 16 x 199 – 655
W30 x 10.5 x 108 – 148	W44 x 16 x 230 – 408

Shapes in bold are most popular shapes. Additional shapes available. * sizes rolled upon agreement.

If I order steel meeting the ASTM A913 specification, does the production process lengthen the lead time?

No. Shapes produced in A913 Grades 50, 65 and 70 have the same availability as any other steel grades. The quenching and self-tempering process used to produce HISTAR®/ASTM A913 shapes is an in-line process, meaning the steel will not leave the production line to receive the treatment. As a result, it is an inherently efficient, performance-enhancing treatment method and will not affect the delivery time for the material.

What lengths are available for A913?

Standard US shipping lengths are 30 to 60 feet and can be ordered in one-inch increments. Other lengths are available subject to agreement.

What are the design rules for columns, beams and connections in A913?

A913 is a referenced standard in the International Building Code; AISC's Steel Construction Manual (AISC 360) and Seismic Design Manual (AISC 341); and CISC's Handbook of Steel Construction.

How does the toughness of A913 compare to other hot-rolled steel grades?

The thermomechanical rolling process in combination with in-line quenching and self tempering results in a very fine grain material, showing a superior toughness when compared to other structural steels.

What Charpy V-Notch toughness requirements does A913 meet?

A minimum average CVN value of 40 ft-lbf at 70°F at the standard flange location is a general requirement of A913. Upon request, a minimum average CVN value of 20 ft-lbf at 70°F in the alternate core location (S30 per ASTM A6) is also available. In addition, A913 can be supplied with CVN values at temperatures as low as -58°F. Other tests temperatures and impact values are available upon agreement.

Where is it common to specify S30 per ASTM A6?

Note that ultimately, one must employ her/his own engineering judgement to understand when to invoke S30 per ASTM A6. However, as reference, per AISC 360, Section A3.1c, S30 is required for hot-rolled sections when the following condition occurs:

- Flange thickness exceeds 2 inches;
- Member is subject to primary tensile forces due to tension or flexure; and
- Member is spliced or connected using complete joint penetration groove welds fusing the thickness of the flange or the flange and web

In addition, per AISC 341, Section A3.3, in elements that are part of a seismic force resisting system (SFRS), S30 is required for hot-rolled sections when the member's flange thickness is equal to or greater than 1.5 inches.

Which shapes can be delivered according to S30 per ASTM A6?

The following shapes are available with CVN values of 20 ft-lbf at 70°F in the alternate core location (S30 per ASTM A6):

W12 x 12 x 170 – 230	W33 x 15.75 x 263 – 387
W14 x 16 x 211 – 873	W36 x 16 1/2 x 282 – 925
W24 x 12 3/4 x 207 – 370	W40 x 12 x 235 – 392
W27 x 14 x 217 – 539	W40 x 16 x 277 – 655
W30 x 15 x 235 – 391	W44 x 16 x 290 – 408

For A913 Grade 50, what is the maximum YS and YS/TS ratio?

A913 Grade 50 is available with maximum yield strength (YS) of 65 ksi and maximum yield strength to tensile strength ratio (YS/TS) of 0.85, thereby making it comparable to A992 steel and an acceptable alternative for use in seismic applications as dissipative elements. This supplementary requirement, which must be specified at the time an order is placed is available at no additional cost and is identified as S75 per ASTM A913.

How ductile are A913 Grades 65 and 70?

Based on tension tests per ASTM A370, the minimum elongation values for A913 Grade 65 are 15 percent for an 8-inch specimen, respectively 17 percent for a 2-inch specimen. The minimum elongation values for A913 Grade 70 are 14 percent for an 8-inch specimen, respectively 16 percent for a 2-inch specimen. These elongation values, in combination with the favorable toughness characteristics of A913, have led to acceptance of these high-strength specifications in seismic design codes.

How can A913 be used in seismic applications?

Based on its favorable ductility and toughness characteristics, A913 steel is approved for use in AISC 341, per section A 3.1: "The specified minimum yield stress of structural steel to be used for members in which inelastic behavior is expected shall not exceed 50 ksi for systems defined in Chapters E, F, G and H, except that for systems defined in Sections E1, F1, G1, H1 and H4, this limit shall not exceed 55 ksi.. Either of these specified minimum yield stress limits are permitted to be exceeded when the suitability

of the material is determined by testing or other rational criteria. Exception: Specified minimum yield stress of structural steel shall not exceed 70 ksi for columns in systems defined in Sections E3, E4, G3, H1, H2 and H3 and for columns in all systems in Chapter F”.

Can A913 be used in bridge applications?

HISTAR® has been used in bridges throughout Europe. In 2018, Grades QST 50, QST 50S, QST 65 and QST 70 were added to the AASHTO-approved ASTM A709 specification with the same chemical and manufacturing requirements as A913, and impact requirements as specified per A709.

How do residual stresses of A913 compare to other structural steels?

There will be little to no difference between the residual stresses of a particular shape in A913 and the same shape in a comparable specification.

How does the fire resistance of A913 compare to other steel grades?

Fire resistance of A913 is the same as that of other hot-rolled structural steel grades.

How does the corrosion resistance of A913 compare to other steel grades?

The corrosion resistance of A913 shapes is the same as for any other structural steel grades.

Can A913 be galvanized?

Yes. A913 is capable of forming a zinc layer during hot-dip galvanization. A913 is delivered with a silicon content ranging between 0.14% and 0.25% and is therefore suitable to be galvanized.

How do I weld A913 material?

A913 Grades 50, 65 and 70 are prequalified weldable materials per AWS D1.1. Designated as Category D materials, Grades 50 and 65 are weldable with minimal to no preheat when the product temperature is above 32°F and when using a low-hydrogen electrode (H8) – an advantage that is the result of the material's low Carbon Equivalent (CEv) values compared to other hot-rolled structural steel. Grade 70 requirements are specified in Category C. Tests have demonstrated that preheat requirements for Grade 70 material up to 2.6 inches in thickness can be reduced to match AWS D1.1 guidelines for A913 Grades 50 and 65. For more information on leveraging this benefit, please contact ArcelorMittal directly.

...okay, if the conditions of a connection require preheating, is it acceptable to preheat A913 steel?

For all types of steel, complex and highly restrained conditions may require preheating. Oftentimes, this can be avoided by careful coordination of the weld sequencing; however, if the preheat cannot be avoided, no issues arise from preheating A913 steel.

What electrodes should be used when welding A913 material?

When selecting welding consumables compatible with A913 grades, it is suggested by AWS D1.1 that E70, E80 and E90 electrodes be used when matching weld metal strength is required for Grades 50, 65 and 70, respectively. In certain conditions, undermatching weld metal is permitted per AWS D1.1, please refer to the code for additional details.

Can A913 be welded in combination to other grades?

Yes. However, per AWS D1.1, the minimum preheat temperature applied to a joint composed of metals with different preheats is required to be the highest of the minimum preheats. Therefore, in connections with mixed metals (i.e. A913 steel combined with A992, A572, A36, etc.) preheat requirements of the other materials may control the welding procedure. Again, preheating the A913 has no detrimental effect.

Is thermal cutting of A913 shapes permitted?

Yes. A913 shapes can be cut with a torch or alternative thermal cutting tools using the same procedures as to any structural steel. According to AWS D1.1 and AISC 360 for shapes with flange thickness exceeding 2 inches, a minimum preheating of 150°F shall be applied prior to the procedure.

Can A913 steel shapes undergo flame straightening treatments?

Yes. As with any other structural steel it is possible to eliminate deformations or to give an A913 member a special shape by flame straightening. For local reheating of the entire material thickness the maximum flame straightening temperature is 1200°F. For local superficial reheating of the surface only, the maximum flame straightening temperature is 1650°F.

Can stress relieving treatments be performed on A913 steel?

Stress relieving post-weld heat treatment (PWHT) may be necessary when the layout of the structure and/or the expected stress condition after welding requires a reduction of the residual stresses. If stress relieving is required, it should be performed in the same manner as for any structural steel grade. The temperature should range between 980°F and 1080°F. The holding time should be two minutes per mm (1/25”) of material thickness, but not less than 30 minutes and not more than 90 minutes.

What can I expect when machining and cutting shapes in A913?

A913 can be machined and cut under the same conditions as grades with same level of tensile strength. Using higher strength steel enables the designer to reduce the size (thickness) of the material and therefore reduce machining times.

What are the environmental features of HISTAR®/ASTM A913?

Shapes in HISTAR®/ASTM A913 are 100% produced from steel scrap. After use or reuse, as for any other steel shapes, shapes in HISTAR® have a recovery rate of approximately 98% – according to European Commission Technical Steel Research – considering recycling and reuse of the material.

Is there a premium for ASTM A913 sections?

No. In North America, all the extra value of ASTM A913 steel – high yield strength (up to 70 ksi); outstanding toughness – (40 ft-lbf at 70°F, standard for all sections and strengths); and excellent weldability (minimal to no preheat) – is provided at the same price you would pay for 50 ksi material (A992, A572 Grade 50, CSA 40.21 350W).

Where can I find additional technical information on HISTAR®/A913 products?

Our specialists are ready to support your projects all over the world. For more information, please visit: sections.arcelormittal.com

Applications of HISTAR®

HISTAR®'s outstanding mechanical properties, coupled with its attractive price, enable it to bring value to various elements of a structure's design. Most frequently, high-strength HISTAR® profiles are used to reduce the weight of strength-governed structural elements, including those in gravity systems, long-span trusses, transfer trusses, outrigger systems, belt trusses, seismic force resisting systems and bridge girders. In addition to weight savings, use of HISTAR® can also positively impact fabrication, transportation, handling, and erection. In heavy shapes, for example, the welding time and costs are lowered as thinner members reduce the weld volume and in many situations, the material can be welded without preheat, thereby leading to considerable savings of time and energy.

Typical applications of HISTAR® include:

Gravity columns

When design is not governed by drift or vibration issues, the use of HISTAR® Grades 65 [450] and 70 [485] in gravity columns with reasonable buckling lengths enables the engineer to reduce the weight and cost of their structures. The typical weight savings on a project that incorporates HISTAR® into gravity columns can vary from 10 to 25 percent of the weight of the entire structure.

Long-span trusses

In long-span trusses, HISTAR® Grades 65 [450] and 70 [485] bring the most value when used as tension members, such as the system's bottom chord, or in compression members with short buckling lengths. Employing high-strength HISTAR® steel in trusses can generally result in a 25 percent reduction in weight compared to designs using only 50 ksi [345 MPa] steel. This reduction in weight is a function of the total span-length and the importance of dead loads on the design.

Seismic design

The use of HISTAR® steel allows the engineer to design a moment-frame structure with the economical "strong column – weak beam" concept. HISTAR® Grade 65 [450], and soon Grade 70 [485], is permissible for use in column sections where the steel is not expected to yield. Coupled with 50 ksi [345 MPa] beam sections, this material enables the engineer to efficiently confine plastic hinging to the beam sections.

Bridge girders

When the design of a bridge is not governed by deflection, which is typically the case for those with light loads and/or short spans, the use of HISTAR® Grades 65 [450] or 70 [485] enables engineers to reduce the weight and the cost of the structure. In addition, the use of A913 Grades 50 [345] and 65 [450] make it possible for the fabricator to weld the steel without preheating (minimum 32 °F [0 °C] with low-hydrogen electrodes).

HISTAR® reference projects

Since its introduction in 1990, HISTAR® has been incorporated into the design and construction of more than 300 projects throughout the world. These projects range from supertall structures including One World Trade Center, The Bow, Shanghai World Financial Center, and Puerta Europa and long-span sports facilities such as Lucas Oil Stadium, Air Canada Centre, and Astana Arena, to aviation facilities, convention centers, industrial buildings, offshore platforms, car parks and bridges. A selection of commissions featuring HISTAR® includes:

High-rise

111 Huntington, Boston
The Bow, Calgary
Eighth Avenue Place, Calgary
Brookfield Place Calgary
Broad J57, Changsha
111 South Wacker, Chicago
150 North Riverside, Chicago
151 North Franklin, Chicago
300 North LaSalle, Chicago
One Grant Park, Chicago
Roosevelt University Wabash Building, Chicago
Emirates Tower, Dubai
VietinBank, Hanoi
One London Place, London, ON
Puerta de Europa, Madrid
Torre de Cristal, Madrid
Torre Cepsa, Madrid
Brickell City Centre, Miami
One Manhattan West, New York
One World Trade Center, New York
Three World Trade Center, New York
Four World Trade Center, New York
Hearst Tower, New York
Hudson Yards, New York
4 Times Square, New York
66 Hudson Blvd, New York
425 Park Ave, New York
Shanghai World Financial Center, Shanghai
New Poly Plaza, Shanghai
Advanced Equities Plaza, San Diego
Russell Investments Center, Seattle
Rainier Square Tower, Seattle
81 Bay St, Toronto, ON
Bay Adelaide Centre, East and West Towers, Toronto

Hospitality and Entertainment

The Cosmopolitan, Las Vegas
The Palazzo, Las Vegas

Healthcare

Simpson Querrey Biomedical Research Center, Chicago
Ann & Robert H. Lurie Children's Hospital of Chicago, Chicago
Prentice Women's Hospital, Chicago
Loma Linda University Medical Center, Loma Linda
Kaiser Permanente Oakland Medical Center, Oakland
Intermountain Medical Center, Salt Lake City

Aviation

Boeing 777 Assembly Building, Everett
Sabiha Gokcen Hangars, Istanbul
Newark Airport Terminal A, Newark

U.S. Football Stadiums

AT&T Stadium, Arlington
Mercedes-Benz Stadium, Atlanta
University of Phoenix Stadium, Glendale
NRG Stadium, Houston
Lucas Oil Stadium, Indianapolis
Los Angeles Stadium at Hollywood Park, Inglewood
U.S. Bank Stadium, Minneapolis

Baseball stadiums

Globe Life Park, Arlington
Marlins Park, Miami
Miller Park, Milwaukee
Chase Field, Phoenix
Safeco Field, Seattle

Arenas

Spectrum Center, Charlotte
Sprint Center, Kansas City
Chase Center, San Francisco
Wisconsin Entertainment and Sports Center, Milwaukee
Canadian Tire Centre, Ottawa
Moda Center, Portland
Air Canada Centre, Toronto
Rogers Arena, Vancouver, B.C.

Convention centers

McCormick Place Expansion, Chicago
The Huntington Convention Center of Cleveland, Cleveland
Reliance BKC Convention Center, Mumbai
Phoenix Convention Center Expansion, Phoenix
Metro Toronto Convention Centre, Toronto
Walter E. Washington Convention Center, Washington D.C.
Vancouver Convention Centre, West Building, Vancouver, B.C.

Industrial

Nucor Steel Decatur, Decatur, AL
Glider Offshore, Gulf of Mexico
URSA Offshore, Gulf of Mexico
Diandong Power Station, Yunnan, China
Lanxi Power Station, Zhejiang, China
Tesla Gigafactory 1, Sparks, NV

**ArcelorMittal International
North America Headquarters**

1 South Dearborn Street, 18th Floor
Chicago, Ill. 60603
T +1 312 899 3500

Canada / Burlington

T +1 905 631 9500

México / Querétaro

Priv. de los Industriales No. 110-A, Desp.802
Col. Ind. Benito Juárez, 76100 Querétaro,
Qro.
T +52 442 218 2887